

Europäisches **Patentamt**

European Patent Office ...

PCT/EP2004/007.631 Office européen

des brevets

WIPO



REC'D 04 OCT 2004 PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten internationalen Patentanmeldung überein.

The attached documents are exact copies of the international patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement. déposée de la demande de brevet international spécifiée à la page sulvante.

PRIORITY

COMPLIANCE WITH RULE 17.1(a) OR (b)

Den Haag, den The Hague, La Haye, le

3 0 SEP 2004

Der Präsident des Europäischen Patentamts Im Auftrag For the President of the European Patent Office Le Président de l'Office européen des brevets p. o.

C. Stuckart

Patentanmeldung Nr. Patent application no. Demande de brevet nº

PCT/EP 03/07737

BEST AVAILABLE COPY

Blatt 2 der Bescheinigung Sheet 2 of the certificate Page 2 de l'attestation



Anmeldung Nr.:

Application no.: Demande n°:

PCT/EP 03/07737

Anmelder: Applicant(s): Demandeur(s):

1. Saudi Company for MFG Synthetic Grass fiber - Jeddah, Saudi Arabia

2. VERLEYEN, Marc - Desselgem-Waregem, Belgium

Bezeichnung der Erfindung:

Title of the invention:

Titre de l'invention:

Artificial turf

Anmeldetag: Date of filing: 14 July 2003 (14.07.2003)

Date de dépôt:

In Anspruch genommene Priorität(en)

Priority(ies) claimed Priorité(s) revendiquée(s)

Staat: State: Tag: Date: Aktenzeichen:

File no.

Pays:

Date:

Numéro de dépôt:

Benennung von Vertragsstaaten : Siehe Formblatt PCT/RO/101 (beigefügt) : Designation of contracting states : See Form PCT/RO/101 (enclosed) Désignation d'états contractants : Voir Formulaire PCT/RO/101 (ci-joint)

Bemerkungen: Remarks: Remarques:

Box No. V	DESIGN	ATION	OF	STATES
-----------	--------	--------------	----	--------

Mark the applicable check-boxes below; at least one must be marked.

The	follo	wing designations are hereby made unde	r Rul	4.9(a):	•			Ì
n		1 Detent						i
R	AP	ARIPO Patent: GH Ghana, GM G SL Sierra Leone, SZ Swaziland, TZ Ur State which is a Contracting State of	ited R the Ha	rare Protocol and of the	PCT (if other ki	nd of prote	ction or treatment de	estred,
X	EA	Eurasian Patent: AM Armenia, AZ A RU Russian Federation, TJ Tajikistan,	zerba TM	jan, BY Belarus, KG Ky urkmenistan, and any of	rgyzstan, KZ Ki ther State which	is a Contra	cting State of the Eu	
	EP	European Patent: AT Austria, BE Be Republic, DE Germany, DK Denmark IE Ireland, IT Italy, LU Luxembourg, TR Turkey, and any other State which	K, EE MC	Istonia, ES Spain, Fi Fi Monaco, NL Netherlands Intracting State of the E	, PT Portugal, S Suropean Patent	E Sweden, Convention	SI Slovenia, SK Slovenia, and of the PCT	ovakia, U Hungary,
		OAPI Patent: BF Burkina Faso, BJ GA Gabon, GN Guinea, GQ Equator TD Chad, TG Togo, and any other Strof protection or treatment desired, specific protection of the strong p	ial Gu ate wh cify or	ch is a member State of dotted line)	OAPI and a Con	tracting St	ate of the PCT (if oth	er kind
Ns	ition	al Patent (if other kind of protection o	r treat	nent desired, specify on a	iotted line):			1
	ATE	TT 14 A A 1. Tominator		Gamhia	100 L	NZ New 2	ealand	· · · · · ·
		To a second seco	7	O	🗵	OM Oman	•	
İ	AT.	Albania	HU	Hungary		PH Philip	oines	• • • • • •
162		A	α П.	Igrael	NCB	PT Portug	;a1	
1.0	ATI	Australia	0 IN	India		KO Koma	ma an Federation	
17	A 7.	Azerbaijan	IS IS	Iceland	(A)	KU Kussi		
K	BA	Bosnia and Herzegovina	JP	Kenya		SC Seuch	elles	
X	BB	Barbados	KE	Kenya		SD Sudar	1	
X	BG	Bulgaria	K KC	Kyrgyzstan	amphio M	SE Swed	en	1
Σ.		Brazil				SC Sings	nore	
	BY	Belarus	u	of Korea	[X]	SK Slove	kia	
	BZ	Belize		Kazakhstan	12	SI. Sierr	Leone	
Q.	CA					TJ Taiik	istan	
	CH	& LI Switzerland and Liechtenstein	ייו אַ	Saint Lucia	ÜŽ	TM Turk	menistan	
	•	China	W + 1	Tibonia	ŪX.	TN Tuni	sia	Į.
K		Colombia Costa Rica	TO T.	Lesotho		TR Turk	ey	
	U CH	J Cuba	IN T	Lithuania	(X	TT TYM	uau anu rocașo	
		Czech Republic	D L	Luxembourg				
			NA -	7 7 -4	(2	TZ Unit	ed Republic of Tanza	ania
ľŘ	זע ע זת מ	K Denmark	M	A Morocco		UA Ukr	aine	• • • • • • • •
		M Dominica	X M	n n Maldava	. Di	IIIG Uga	nda	
1 6	7 D2	Z Algeria			12	US Unit	ed States of Americ	a
li	7 1 1 1 1 1 1 1 1 1 1	T Housdon	N N	G Madagascar				
1 3	Z EI	E Estonia	X N	K The former Yugoslav	Republic of	UZ Uzb	ekistan	onodines
ł	X Es	S Spain		Macedonia		VC Sair	it Vincent and the Oi	enaumes
H	X FI	Finland	X V	N Mongolia	y	N VIN VIE	t Nam	
1	X G	B United Kingdom	X 1	WMalawi		MYU Ser	Dia and Montenegro	
11	X G	D Grenada	M V	IX Mexico		LA SOU	un Antica	
	X G	D Grenada E Georgia	X I	IZ Mozambique		7 700 7:n	nbabwe	
		H Ghana						
1	Chac	k-boxes below reserved for designating	State	which have become par	rty to the PCT af	ter issuance	e of this sheet:	
1		Pta Pantia New Guillea	ш.				·	
-			- 11:	ing to the designations r	made above the	annlicant a	so makes under Kul	e 4.9(D) all
	appli	lesignation which is not confirmed before cant at the expiration of that time limit.	(Con	irmation (including fees) i	must reach the red	eiving Offic	e within the 15-month	ime imil.)
		• · · · · · · · · · · · · · · · · · · ·						

P26840PC00/HJB

5

20

25

30

Title: Artificial turf

A first aspect of the present invention relates to an improved artificial turf filament.

Artificial turfs are known for indoor and outdoor use, primarily as a landscaping, recreational or sports surface.

Conventional artificial turf structures include a substrate onto which artificial turf filaments are anchored. The structure further commonly comprises a weather-resistant, cushioned backing. The filaments are commonly heavy denier synthetic polymer filaments simulating natural grass.

Conventional synthetic artificial turf filaments have a rectangular or oval cross-section.

US 6 432 505 discloses other artificial turf filaments, having a rounded or oval cross-section as well as filaments having a diamond shaped cross-section.

US 4 356 220 discloses filaments having rectangular cross-section, as well as having a circular or triangular cross-section.

US 6 495 236 discloses hollow tubular filaments for artificial turf, said filaments being anchored to a substrate so that U-shaped tubes are formed.

JP 9111532 discloses an artificial turf filament with an essentially rectangular cross-section having longitudinal ribs on the opposed main faces.

The first aspect of the present invention aims to provide an improved artificial turf filament.

A further object of the first aspect of the present invention is to provide an artificial turf filament having an improved lifetime.

Yet another object of the first aspect of the present invention is to provide an artificial turf filament suitable for ball sports, in particular soccer.

The first aspect of the present invention provides an artificial turf filament, which is characterized in that the cross-section of the filament has a central area and two wing areas on opposite sides of said central area and integral with said central area, said wing areas being arranged in a diverging orientation.

Preferably the filament is fortified by:

3

:5

30

35

- the central area of the filament having a thickness greater than the thickness of the wing areas, and/or
- the filament, preferably the central area, containing one or more reinforcement fibres.

The invention is based on the insight that thus shaped cross-section results in an advantageous behaviour or the filaments as the filaments are mechanically loaded. In particular the resilient behaviour of the filament after deformation, e.g. after being stepped on, is improved. Also the behaviour of the artificial turf is improved as one considers a ball rolling over the turf, e.g. in soccer. The cross-section allows for a roll behaviour of a (soccer) ball closely resembling the rolling of said ball over a well-maintained natural grass surface. The artificial turf filament combines a good resistance against repeated deformation with durable flexibility.

Preferably the central area of the filament has a thickness greater than the thickness of the wing areas, at least of a part of each wing area adjoining said central area. In this manner the central area forms a stem.

Preferably the central area of the filament has a thickness at least 50%, preferably at least 100%, greater than the thickness of the wing areas, at least of a part of each wing area adjoining said central area.

Further preferred embodiments of the artificial turf filament are disclosed in the subclaims and in the description that follows.

The first aspect of the present invention also relates to an artificial turf containing said artificial turf filaments.

Preferred embodiments of such an artificial turf are also disclosed in the subclaims and the description that follows.

The second aspect of the present invention relates to bundled artificial turf filaments.

In conventional artificial turf structures the turf comprises a substrate, commonly in the form of a carpet, with a multiplicity of artificial turf filaments anchored to said substrate.

Also conventionally a filling material, such as for example sand, rubber particles, etc, is deposited over the substrate and in between the filaments, so that the upper ends of the filaments extend above the layer of filling material. It is common to perform a brushing process in order to distribute the filling material over the substrate and bring it in the voids between the filaments.

In practice problems have been encountered when distributing the filling material over the artificial turf in order to create the filling material layer. In particular it has proved difficult to bring the filling material in the voids between the filaments.

25

US 5 462 778 discloses an artificial turf having cut piles formed over the surface of a backing structure by implanting a multiplicity of tufts. Each tuft comprises one or a plurality of pile yarns. Each of the pile yarns is composed of a plurality of bundled flat

filaments twisted and fixed in the twisted state into a slender form having an approximately spiral cross-section.

These known artificial turf bundles are likely to improve the distribution of the filling material over the turf when compared to turf structures having non-bundled filaments. However, these bundles loose their cohesion already during production of the carpet. Also these known bundles are difficult to produce and have unfavourable playing characteristics in sports.

The second aspect of the present invention aims to provide to improved bundled artificial turf filaments.

It is a further object of the second aspect of the present invention to provide an artificial turf including a multiplicity of bundled artificial turf filaments, wherein the distribution of a filling material over the turf can be effected without problems.

The second aspect of the invention provides a bundle of a plurality of artificial turf filaments, which is characterized in that the artificial turf filaments are held together by one or more wrapping filaments wrapped around said artificial turf filaments.

By using one or more wrapping filaments bundles of artificial turf filaments can be created efficiently in-line with the production process of the artificial turf filaments.

In a preferred embodiment said one or more wrapping filaments are bonded, preferably releasable bonded, to said artificial turf filaments.

80

In a practical embodiment the one or more wrapping filaments are synthetic polymer filaments and are bonded to each other and/or to the artificial turf filaments by a thermal bonding process.

In a highly preferred embodiment the one or more wrapping filaments are releasable bonded so that upon mechanical action, preferably a brushing process, the bonds are released.

The bundled artificial turf filaments can be manufactured by holding multiple artificial turf filaments next to one another while one or more wrapping filaments are wrapped around said artificial turf filaments.

It is then preferred that said one or more wrapping filaments are synthetic polymer filaments and are (releasable) bonded to each other and/or to the artificial turf filaments by a thermal bonding process.

In a practical embodiment of this manufacturing process the one or more wrapping filaments are heat treated before wrapping around said artificial turf filaments, so that the surface of the wrapping filament melts and the melted surface is brought against the artificial turf filaments as the one or more wrapping filaments are wrapped around said artificial turf filaments. If multiple wrapping filaments are present it is also possible that the melted surfaces of the wrapping filaments are fixed to each other at intersection points as the wrapping filaments are wrapped around said artificial turf filaments.

The second aspect of the invention further relates to an artificial turf comprising a substrate and a plurality of bundled artificial turf filaments having one or more wrapping filaments.

5

The second aspect of the present invention also relates to a method of preparation of an artificial turf, wherein said turf provided with bundled artificial turf filaments using wrapping filaments is subjected to a wrapping filaments release treatment effecting the release of the wrapping filaments from the artificial turf filaments.

It is highly preferred that - prior to effecting the release of the wrapping filaments - a filling material is deposited between the bundles of artificial turf filaments. Said filling material can preferably include rubber particles.

By keeping the bundles more or less intact during the deposition of the filling materials the voids between the bundles will be easily accessible for the filling material. Once the filling material has been distributed satisfactorily, the mechanical action, preferably brushing with a suitable brush, will cause the bonds of the wrapping filaments to release. Thereby the properties of the individual artificial turf filaments return.

It will be apparent to the man skilled in the art that the aspects of the invention can be used independent from one another but also in various combinations. Such a combination of filaments having a V shaped cross-section and the bundling of these filaments to allow for an improved deposition of the filling material is considered advantageous by the applicant.

The aspects of the present invention will now be explained further referring to the drawings and the description that follows.

In the drawings:

)

5

Ю

- Fig. 1 shows in vertical cross-section a typical example of an artificial turf including filaments,
- Fig. 2 shows a cross-sectional view of a first exemplary embodiment of the artificial turf filament according to the first aspect of the present invention,
- Fig. 3 shows a cross-sectional view of a second exemplary embodiment of the artificial turf filament according to the first aspect of the present invention,
- Fig. 4 shows a cross-sectional view of a third exemplary embodiment of the artificial turf filament according to the first aspect of the present invention,

Fig. 5 shows a cross-sectional view of a fourth exemplary embodiment of the artificial turf filament according to the first aspect of the present invention,

Fig. 6 shows a cross-sectional view of a fifth exemplary embodiment of the artificial turf filament according to the first aspect of the present invention,

Fig. 7 shows a cross-sectional view of a sixth exemplary embodiment of the artificial turf filament according to the first aspect of the present invention, and

Fig. 8 shows a stage of the manufacturing of bundled artificial turf filaments according to the second aspect of the invention,

Figure 1 shows a conventional artificial turf 1 placed on a stabilization and drainage layer 2. The turf 1 is of a carpet like structure and includes an elastic backing layer 3, a substrate 4 on top of said backing layer 3 and a multiplicity of artificial turf filaments 5, which can be tufted or the like onto the substrate 4. A layer 6 of filling material, such a for example sand and/or rubber particles or other particles, is present on top of the substrate 4. The upper ends of the filaments 5 extend above the surface of the filling layer 6.

Figure 2 shows at rigth angles to the longitudinal extent thereof a synthetic polymer artificial turf filament 10 having a uniform cross-section over its length. These filaments 10 can replace the filaments 6 in the figure 1 embodiment of the turf 1.

The filament 10 has an essentially V-shaped cross-section, which consists of a central area 11 and two wing areas 12, 13, which are integral with said central area and have a diverging orientation with respect to one another.

The wing areas 12, 13 have an identical cross-section defined by two flat planar opposed faces 12a, 12b and 13a, 13b. Centrally between the opposed faces of each wing area 12, 13 an imaginary centre line 14, 15 can be recognized. The distance between the centre lines 14,

15 of the wing areas 12,13 is the greatest at the free ends of the wing areas 12, 13.

The opposed faces 12a, 12b, 13a, 13b of each wing 12, 13 define a thickness of the wing area at right angles to the centre line. This thickness of each wing area 12, 13 tapers from said central area 11 towards the free end of each wing 12, 13.

The central area 11 of the filament 10 has a thickness greater than the thickness of the wing areas 12, 13. As can be seen in figure 2 the central area 11 has - in the direction of a bisector 16 of both centre lines 14, 15 of the wing areas 12, 13 - a dimension "T" which is greater than the thickness of the adjoining wing areas 12, 13.

In this embodiment the centre lines 14, 15 are straight and include an angle. The point of intersection of the two centre lines 14, 15 here falls within the central area 11 of the cross-section of the filament 10.

At the side of the diverging wing areas the central area 11 has a face 11b of a curved concave shape, merging flush into the adjacent flat planar faces 12b, 13b of the wing areas 12, 13.

At the side remote from the diverging wing areas 12, 13 the central area 11 has a face 11a which is flat and planar and thus forms a flattened apex of said V-shaped cross-section. The face 11a merges via preferably rounded edges into the adjacent flat planar faces 12a, 13a of each wing area 12, 13.

The wings 12, 13 here each have a rounded tip 12c, 13c at their free end.

In a practical embodiment the total area of the cross-section of the filament 10 is 0.1981 mm, which corresponds to 1902 dtex.

In this embodiment the angle between centre lines 14, 15 is 112 degrees. The dimension T is 0.197 mm. The width of the filament across the centre of the tips 12c, 13c is 1.35 mm.

Figure 3 discloses a filament 20 having the same basic design of cross-section as the filament 10 in figure 2. Therefore similar parts are indicated with the same reference numerals.

The main difference is the angle between the centre lines 14, 15 which is 120 degrees in the embodiment of figure 3. The dimension T here is 0.13 mm. The total cross-sectional area is 0.1963 mm, resulting in 1885 dtex.

Figure 4 discloses a filament 30 having the same basic design of cross-section as the filament 20 in figure 3. Therefore similar parts are indicated with the same reference numerals.

5

во

The main difference is the design of the tips of the wing areas 12, 13. In figure 4 it can be seen that the tips 12c, 13c have an essentially circular cross-section having a diameter that is greater than the adjoining part of the wing area. In this embodiment the angle between the centre lines 14, 15 is 120 degrees as in the embodiment of figure 3. The dimension T here is 0.13 mm. The width between the centres of the tips 12c, 13c here is 1.32 mm.

The total cross-sectional area is 0.1926 mm, resulting in 1849 dtex.

Figure 5 discloses a filament 40 having the same basic design of cross-section as the filament 10 in figure 2. Therefore similar parts are indicated with the same reference numerals.

The main difference is the design of the central area 11. Here the face 11b is not concave as in figure 2 but convex so that the face 11b of said central area 11 forms an outwardly protruding bulb. This results in a dimension T about 100% greater than the thickness of the adjoining wing areas 12, 13.

In this embodiment the angle between the centre lines 14, 15 is 112 degrees as in the embodiment of figure 2. The dimension T here is 0.167 mm. The width between the centres of the tips 12c, 13c here is 1.33 mm.

The total cross-sectional area is 0.1957 mm, resulting in 1878 dtex.

Figure 6 shows a filament 45 having a cross-section consisting of a central area 46 and two wing areas 47, 48. The wing areas 47, 48 each have a curved centre line 47a, 48a. The filament 45 has opposed faces 47b, 47c and 48b, 48c, in this example defining an essentially uniform thickness between the central area and the rounded tip 47d, 48d of increased radius. The central area 46 forms a protrusion with respect to the faces 47c, 48c of the wing areas 47, 48, the other face being essentially flush at the location of said central area 46.

Figure 7 shows an alternative design of the filament wherein not only the central area 71 of the filament 70 has a thickness greater than the thickness of the wing areas 72, 73, but also a reinforcement fibre 74 is embedded in said central area 71.

In a practical embodiment said fibre 74 is a polyamide fibre whereas said fibre 74 is embedded in another polymer, such as polyethylene.

The reinforcement fibre 74 preferably has a higher E-modulus than the polymer in which it is embedded. The fibre can be embedded during the extrusion of the filament 70.

Referring to the figure 8 the second aspect of the invention will now be explained in detail.

Figure 8 shows a bundle of a plurality of artificial turf filaments 50, which filaments are preferably designed according to the first aspect of the present invention, e.g. filaments 10, 20, 30, 40, 45 or 70 as shown in figures 2-7. It is noted that the second aspect of the invention is also applicable in combination with other filament designs, such as for example the prior art designs described earlier in this application.

The artificial turf filaments 50, in this example six filaments, are held together by one or more wrapping filaments 60 that are wrapped

around said artificial turf filaments 50. In this example two wrapping filaments 60a, 60b are wrapped around said artificial turf filaments in a helical path, havin opposite directions, so that the filaments 60a, 60b intersect each other at cross points 61. The filaments 60a, 60b are held in this example during the wrapping in a parallel orientation with respect to one another in a single flat plane.

At these cross points 61 the wrapping filaments 60a, 60b are bonded, in this example releasable bonded, to one another.

Also the wrapping filaments 60a, 60b are bonded, in this example releasable bonded, to said artificial turf filaments 50.

The bundle shown in figure 8 is preferably manufactured by wrapping heat treated synthetic polymer wrapping filaments 60a, 60b around the artificial turf filaments 50, which are preferably also heat treated. But with a suitable heat treatment the effect can be obtained that a thermal bonding occurs between the intersecting wrapping filaments 60a, 60b and (as is preferred) between the wrapping filaments 60a, 60b and the artificial turf filaments 50.

In particular it is envisaged that the wrapping filaments 60a, 60b are releasable bonded so that upon mechanical action, preferably a brushing process, the bonds are released. In practice the wrapping filaments 60a, 60b can be heated to a melting temperature at their surface so that the surface of the wrapping filaments sticks to the surface of the artificial turf filaments. This creates a bond that can be released later, as will be explained below.

In a practical production process the artificial turf filaments as well as the wrapping filaments can be subjected to a common heat treatment prior to the wrapping. It is then preferred that the wrapping filaments have a thickness which is less than the thickness of the artificial turf filaments, so that the wrapping filaments reach a higher temperature and the hot surface thereof will stick to the somewhat colder surface of the artificial turf filaments.

It will be apparent that the bundles as shown in figure 8 can be integrated into an artificial turf as in figure 1, wherein the conventional filaments 5 are replaced by bundled artificial turf filaments having wrapping filaments 60a, 60b around the artificial turf filaments 50.

The wrapping of the filaments 50 of course has an impact on the behaviour of the artificial turf. It is envisaged that the bond of the wrapping filaments is such that they easily release from the artificial turf bundles not during the production of the artificial turf carpet itself, but primarily after installation of said turf, in particular after the filling material has been deposited between the bundles. The bonds can be such that release is effected by normal use of the turf, e.g by playing a sport, such as soccer on it.

It is also envisaged, either as an alternative for normal use or in combination therewith that the turf is subjected to a wrapping filaments release treatment effecting the release of the wrapping filaments 60a, 60b from the artificial turf filaments 50 at least as far as the upper part of the bundles in the turf structure is concerned.

It is preferred that this wrapping filament release is only effected after a filling material 6 is deposited between the bundles of artificial turf filaments as in figure 1. In a practical process the filling material is distributed over the turf. As the voids between the bundles 50 are easily accessible for the filling material, the problems of the prior art are avoided. Then, preferably by suitable brushing, the wrapping filaments are released from the artificial turf filaments.

This method is in particular suitable when the filling material includes rubber particles, which gave rise to serious problems in the past.

35

CLAIMS

- 1. An artificial turf filament, characterized in that the cross-section of the filament (20; 30; 40; 45) has a central area (11; 46) and two wing areas (12, 13; 47, 48) on opposite sides of said central area and integral with said central area, said wing areas (12, 13; 47, 48) being arranged in a diverging orientation.
- 2. An artificial turf filament according to claim 1, wherein the filament is fortified by:
- the central area (11; 46) of the filament having a thickness greater than the thickness of the wing areas (12, 13; 47, 48), and/or
- the filament, preferably the central area, containing one or more reinforcement fibres (74).
- 3. An artificial turf filament according to claim 2, wherein the central area (11; 46) of the filament has a thickness at least 50%, preferably at least 100%, greater than the thickness of the wing areas (12, 13; 47, 48), at least of a part of each wing area adjoining said central area.
- 4. An artificial turf filament according to one or more of the preceding claims, wherein the wing areas have a cross-section differing from one another.

5

10

- 5. An artificial turf filament according to one or more of the preceding claims, wherein the wings areas (12, 13) each have an essentially straight centre line (14, 15).
- 6. An artificial turf filament (45) according to one or more of the claims 1- 4, wherein the wing areas (46, 47) each have a curved centre line.
- 7. An artificial turf filament according to one or more of the preceding claims, wherein said filament (45) has opposed faces, said central area (46) forming a protrusion in one of said faces with

respect to the adjoining parts of said face defining the wing areas, the other face being essentially flush at the location of said central area (46).

- 8. An artificial turf filament according to one or more of the preceding claims, wherein the distance between the centre lines of the wing areas (12, 13; 47, 48) is the greatest at the free ends of the wing areas.
- 9. An artificial turf filament according to one or more of the preceding claims, wherein the centre lines (14, 15) of the wing areas if said centre lines are essentially straight or imaginary lines interconnecting a centre point of said central area (46) with a point where each of the centre lines intersects the free end of the wing area (47, 48) if said centre lines are essentially curved include an angle of less than 170 degrees.
- 10. An artificial turf filament according to claim 9, wherein said angle is between 90 and 170 degrees, preferably between 100 and 150 degrees, most preferably between 100 and 135 degrees.
 - 11. An artificial turf filament according to one or more of the preceding claims, wherein the wing areas (12, 13) have a thickness measured at right angles to the associated centre line (14, 15), and wherein the wing areas each have a thickness which tapers towards the free end of the wing.
 - 12. An artificial turf filament according to one or more of the preceding claims, wherein the free end of each wing area (12, 13; 47, 48) has a rounded tip (12c, 13c; 47d, 48d).

5

30

35

13. An artificial turf filament according to claim 12, wherein the rounded tip (12c, 13c; 47d, 48d) has a radius greater than a part of the wing area (12, 13; 47, 48) adjoining said rounded tip (12c, 13c; 47d, 48d).

- 14. An artificial turf filament according to one or more of the preceding claims, wherein each wing area (12, 13) has opposed faces (12a, 12b, 13a, 13b) tapering towards the free end of the wing area.
- 15. An artificial turf filament according to one or more of the preceding claims, wherein the central area (11) has in the direction of a bisector of both centre lines of the wings a dimension (T) greater than the thickness of the wing areas.
- 16. An artificial turf filament according to one or more of the preceding claims, wherein the filament (10, 20, 30, 40; 45, 70) contains at least one synthetic polymer.
- 17. An artificial turf filament according to claim 16, wherein the one or more polymers are selected from the group consisting of polyamides, polyesters, polyethylene, polypropylene, nylon.
- 18. An artificial turf filament according to claims 2 and 16, wherein the one or more reinforcement fibres are polyamide or PBT (polybuthylene therephtalate) fibres embedded in polyethylene or another polymer.
- 19. An artificial turf filament according to one or more of the preceding claims, wherein the filament contains an organic material.
- 20. An artificial turf including a plurality of artificial turf filaments according to one or more of the preceding claims.
- 21. An artificial turf (1) having a substrate and a plurality of artificial turf filaments according to one or more of the preceding claims anchored in the substrate and extending there from.
- 22. An artificial turf according to claim 21, wherein said filaments are injected into the substrate, and wherein the substrate is preferably soil.

35

- 23. An artificial turf according to claim 21, wherein said substrate (4) is a carpet and said filaments are anchored to said carpet.
- 24. An artificial turf according to claim 21, wherein said artificial further includes a backing (3) for said substrate (4), said filaments being anchored to said substrate.
- 25. Bundle of a plurality of artificial turf filaments, characterized in that the artificial turf filaments (50) are held together by one or more wrapping filaments (60a, 60b) wrapped around said artificial turf filaments (50).
- 26. Bundle according to claim 25, wherein multiple wrapping filaments (60a, 60b) are wrapped around said artificial turf filaments.
- 27. Bundle according to claim 25 or 26, wherein said one or more wrapping filaments are wrapped around said bundle in a helical path, preferably if multiple wrapping filaments are present in opposite directions.
 - 28. Bundle according to claim 26 or 27, wherein the wrapping filaments (60a, 60b) cross each other at cross points (61), and are bonded, preferably releasable bonded, to one another at said cross points.
 - 29. Bundle according to any of claims 25-28, wherein said one or more wrapping filaments (60a, 60b) are bonded, preferably releasable bonded, to said artificial turf filaments (50).
 - 30. Bundle according to claim 29, wherein said one or more wrapping filaments (60a, 60b) are synthetic polymer filaments and are bonded to each other and/or to the artificial turf filaments (50) by a thermal bonding process.

35


- 31. Bundle according to any of claims 25-30, wherein said one or more wrapping filaments (60a, 60b) are releasable bonded so that upon mechanical action, by normal use of a artificial turf containing said bundles and/or by a brushing process applied to said turf, the bonds are released.
- 32. Bundle according to any of claims 25-31, wherein said one or more wrapping filaments (60a, 60b) have a thickness which is less than the thickness of the artificial turf filaments (50).
- 33. Method of manufacturing a bundle of a plurality of artificial turf filaments, characterized in that said multiple artificial turf filaments (50) are held next to one another while one or more wrapping filaments (60a, 60b) are wrapped around said artificial turf filaments.
- 34. Method according to claim 33, wherein multiple wrapping filaments (60a, 60b) are wrapped around the artificial turf filaments (50), preferably in opposite helical paths such that said wrapping filaments cross each other at cross points (61).
- 35. Method according to claim 33 or 34, wherein the one or more wrapping filaments (60a, 60b) are bonded, preferably releasable bonded, to said artificial turf filaments (50).
- 36. Method according to claim 35, wherein said one or more wrapping filaments (60a, 60b) are synthetic polymer filaments and are bonded to each other and/or to the artificial turf filaments (50) by a thermal bonding process.
- 37. Method according to claim 36, wherein said one or more wrapping filaments (60a, 60b) are heat treated before wrapping around said artificial turf filaments (50), so that the surface of the wrapping filament melts and the melted surface is brought against the artificial turf filaments as the one or more wrapping filaments are wrapped around said artificial turf filaments.


- 38. Method according to claim 37, wherein the artificial turf filaments (50) and the one or more wrapping filaments (60a, 60b) are subjected to a common heat treatment, the one or more wrapping filaments having a smaller thickness and thus being heated to a higher temperature, so that the surface of the one or more wrapping filaments melts.
 - 39. Artificial turf comprising a substrate (4) and a plurality of bundled artificial turf filaments (50, 60a, 60b) according to one or more of the preceding claims 25-32 extending from said substrate.
 - 40. Artificial turf comprising a substrate (4) and a plurality of bundled artificial turf filaments (50, 60a, 60b) according to one or more of the preceding claims 25-32 extending from said substrate, wherein said wrapping filaments release from said bundles as a result of normal use of said turf, e.g. by playing soccer, and/or as a result a wrapping filament release treatment applied to said turf after installation of said turf.
 - 41. Method of preparation of an artificial turf according to claim 39 or 40, wherein said turf (1) is subjected to a wrapping filaments release treatment effecting the release of the wrapping filaments from the artificial turf filaments.
 - 42. Method of preparation of an artificial turf according to claim 39 or 40, wherein prior to effecting the release of the wrapping filaments a filling material is deposited between the bundles of artificial turf filaments.
- 3 43. Method according to claim 42, wherein said filling material includes rubber particles.


ABSTRACT


An artificial turf filament has a cross-section that includes a central area and two wing areas integral with said central area.


Further a bundle of a plurality of artificial turf filaments is proposed, wherein the artificial turf filaments are held together by one or more wrapping filaments wrapped around said artificial turf filaments. The wrapping filaments cross each other at cross points, and are bonded, preferably releasable bonded, to one another at said cross points. Also the wrapping filaments are bonded, preferably releasable bonded, to said artificial turf filaments.

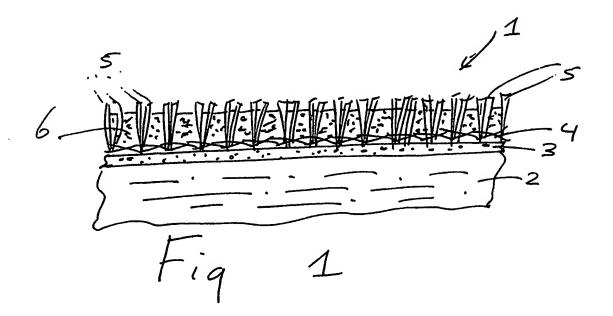

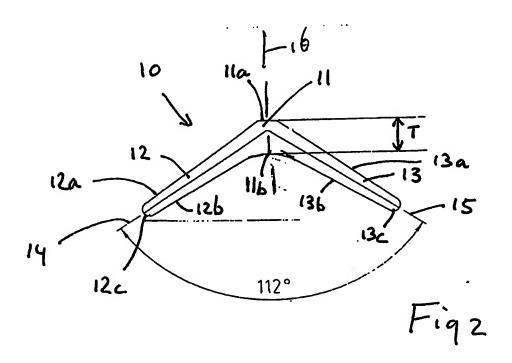

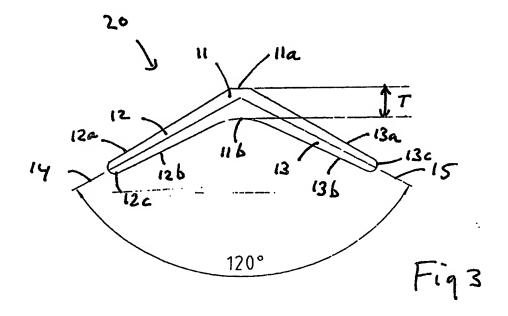

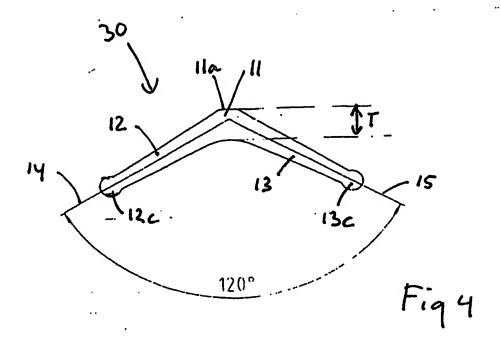

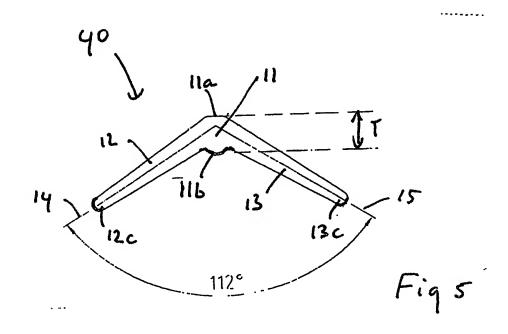

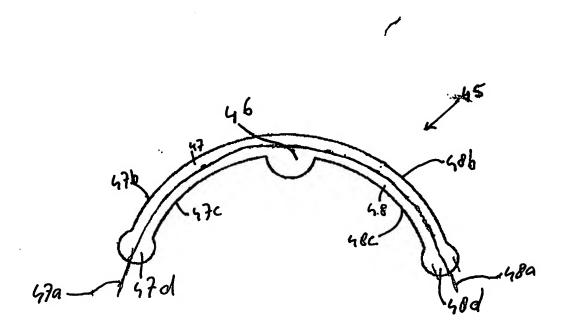


Fig 6

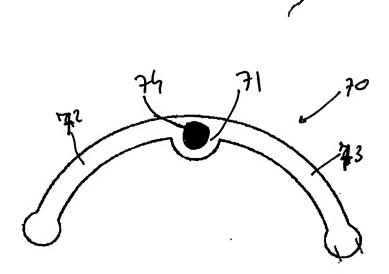


Fig 7

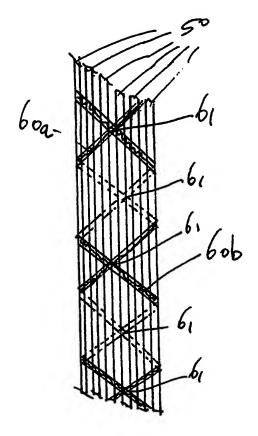


Fig &

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:			
BLACK BORDERS			
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES			
☐ FADED TEXT OR DRAWING			
☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING			
☐ SKEWED/SLANTED IMAGES			
☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS			
GRAY SCALE DOCUMENTS			
☐ LINES OR MARKS ON ORIGINAL DOCUMENT			
☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY			
П			

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.